


The alurays Customized Luminaires / *Die alurays-Projekt-Leuchten*

Luminaire No.180 / *Leuchte Nr. 180*

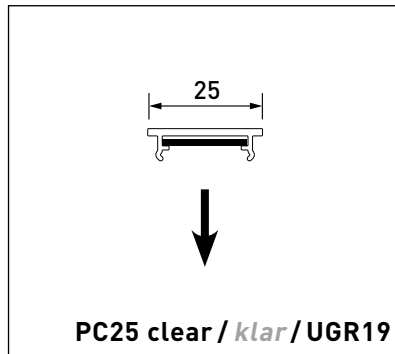


PC25 clear / klar UGR19

Polycarbonate cover, high transparent with anti glare film
Polykarbonat-Abdeckung, hoch transparent mit Entblendungsfolie

AAS28-LIN

Surface mounted profile (anodized aluminium EV1, 20 my)
Aufbauprofil (Aluminium eloxiert EV1, 20 my)

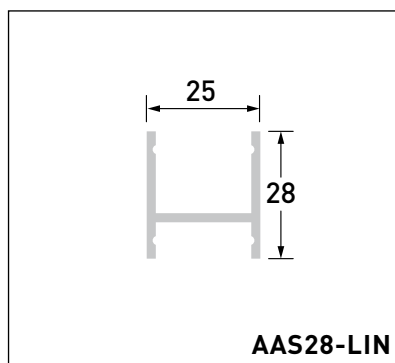

AKF3

Snap-on cable channel, (anodized aluminium EV1, 20 my)
Aufklippbarer Kabelkanal (Aluminium eloxiert EV1, 20 my)

- Protection grade / *Schutzart* IP20
- LED Osram Prevaled Duris E5
- Constant current / *Konstantstrom*
- 20 W
- 1820 lm
- 4000K
- Length / *Länge* 1000mm

