


The alurays Customized Luminaires / *Die alurays-Projekt-Leuchten*

Luminaire No.182 / *Leuchte Nr.182*

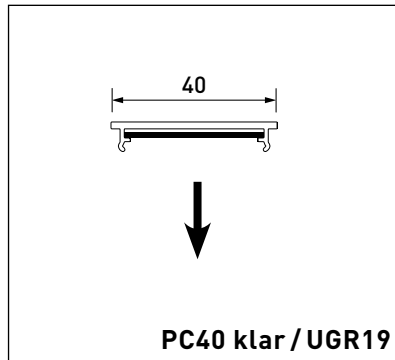


PC40 clear / klar UGR19

Polycarbonate cover, high transparent with anti glare film
Polykarbonat-Abdeckung, hoch transparent mit Entblendungsfolie

AA4035

Surface mounted profile (anodized aluminium EV1, 20my)
Aufbauprofil (Aluminium eloxiert EV1, 20my)

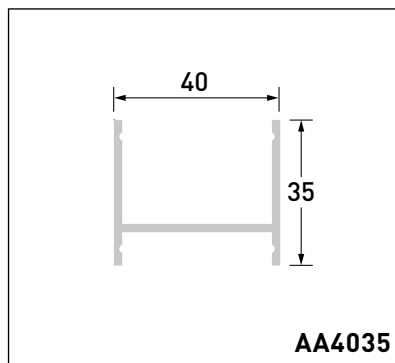

AKF4025

Snap-on cable channel, (anodized aluminium EV1, 20my)
Aufklippbarer Kabelkanal (Aluminium eloxiert EV1, 20my)

- Protection grade / *Schutzart* IP20
- LED Osram PrevaLED Duris E5
- Constant current / *Konstantstrom*
- 33W/m
- 3003 lm
- 4000K
- Length / *Länge* 1000mm

