


The alurays Customized Luminaires / *Die alurays-Projekt-Leuchten*

Luminaire No.184 / *Leuchte Nr. 184*

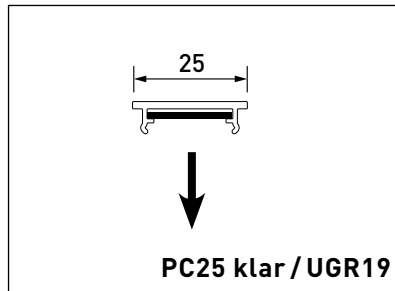


PC25 clear / klar UGR19

Polycarbonate cover, high transparent with anti glare film
Polykarbonat-Abdeckung, hoch transparent mit Entblendungsfolie

AAS28-LIN

Surface mounted profile (anodized aluminium EV1, 20 my)
Aufbauprofil (Aluminium eloxiert EV1, 20 my)

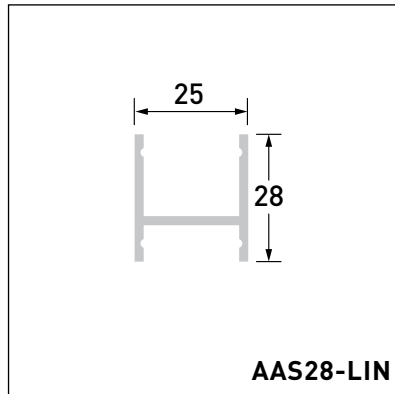

AKF3

Snap-on cable channel, (anodized aluminium EV1, 20 my)
Aufklippbarer Kabelkanal (Aluminium eloxiert EV1, 20 my)

- Protection grade / *Schutzart* IP20
- LED Bright
- DC24 V
- 25 W/m
- 1820 lm
- 3000 K
- Length / *Länge* 1000 mm

