
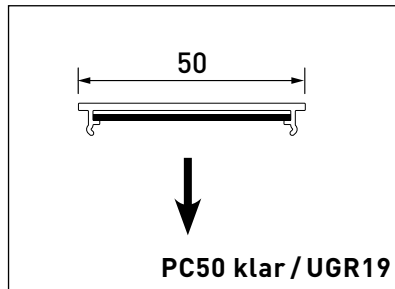


The alurays Customized Luminaires / *Die alurays-Projekt-Leuchten*

Luminaire No.185 / *Leuchte Nr.185*

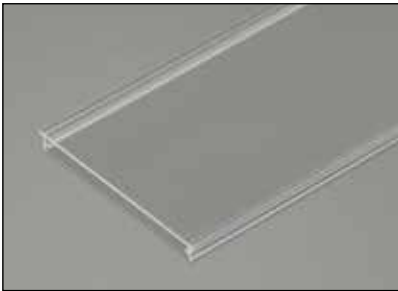


PC50 clear / klar UGR19

Polycarbonate cover, high transparent with anti glare film
Polykarbonat-Abdeckung, hoch transparent mit Entblendungsfolie

AA5031

Surface mounted profile
 (anodized aluminium EV1, 20 my)
*Aufbauprofil
 (Aluminium eloxiert EV1, 20 my)*

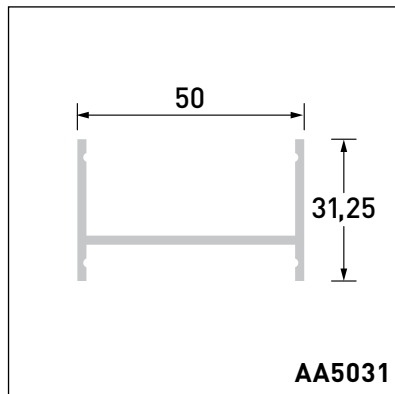

AKF5017

Snap-on cable channel,
 (anodized aluminium EV1, 20 my)
*Aufklippbarer Kabelkanal
 (Aluminium eloxiert EV1, 20 my)*

- Protection grade / *Schutzart* IP20
- LED Bright
- DC24 V
- 25W/m
- 3518 lm
- 4000K
- Length / *Länge* 1000mm

