
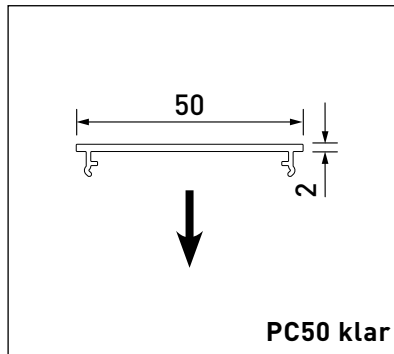


The alurays Customized Luminaires / Die alurays-Projekt-Leuchten

Luminaire No. 188 / Leuchte Nr. 188

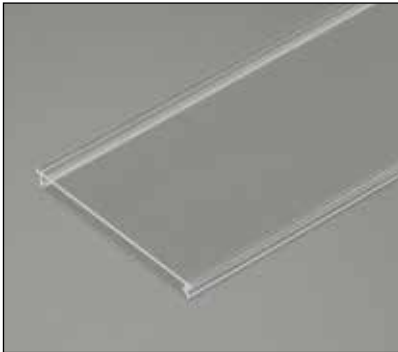


PC50 clear / klar

Polycarbonate cover,
high transparent
*Polykarbonat-Abdeckung,
hoch transparent*

AA5021-LIN

Surface mounted profile
(anodized aluminium EV1, 20 my)
*Aufbauprofil
(Aluminium eloxiert EV1, 20 my)*

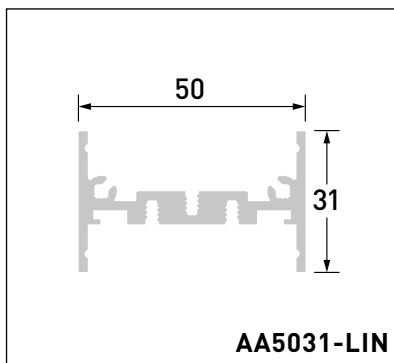

AKF5017

Snap-on cable channel,
(anodized aluminium EV1, 20 my)
*Aufklippbarer Kabelkanal
(Aluminium eloxiert EV1, 20 my)*

- Protection grade / *Schutzart* IP20
- Osram SchallLED
- Optics / *Optik* LINNEA 60°
- 4000 K
- 29 W/m

